


DTMT-STB/STMT-STB

Positionable Run Tee, SAE Straight Thread

CBC/CS-Lok

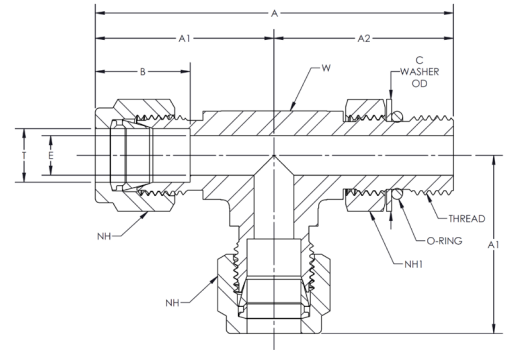

CBC PART NUMBER	INTERCHANGES WITH		CS PART NUMBER	INTERCHANGES WITH		T TUBE O.D.	THREAD	A	A1	A2	B	C	E THRU HOLE	NH NUT HEX	NH1 NUT HEX	W WRENCH FLAT
4-DTMT-4-STB	400-3TST	4M5RT4	4-STMT-4-STB	4-4-4 R5BZ		4	7/16/20	2.24	1.12	1.12	0.61	0.65	0.19	9/16	9/16	1/2
6-DTMT-6-STB	600-3TST	6M5RT6	6-STMT-6-STB	6-6-6 R5BZ		6	9/16-18	2.53	1.26	1.27	0.67	0.79	0.28	11/16	11/16	5/8
8-DTMT-8-STB	800-3TST	8M5RT8	8-STMT-8-STB	8-8-8 R5BZ		8	3/4-16	2.97	1.48	1.49	0.90	1.01	0.41	7/8	7/8	5/8

NOTE: Dimensions subject to change, to be used for reference only.

* Standard O-ring material is FKM. Other options are available upon request.

* Adapts to SAE J1926-1 and ISO 11926-1 straight thread boss.